



MOVE/3500



Accept any type of payment, while doing business on-the-go

- LeverageTeliumapplications on the next-generation payment terminal
- MakeNFCpaymentaseamlessconsumerexperience
- BringmobilepaymenttoyourPOS with the most connected terminal



THE MOVE/3500 OFFERS A SEAMLESS PAYMENT EXPERIENCE WHILE ON-THE-GO. AS A BEST-IN-CLASS, POCKET-SIZED PORTABLE TERMINAL IT COMPLIES WITH FUTURE SECURITY STANDARDS.

HIGHEST SECURITY

The Move/3500 is PCI-PTS 5.x certified. Its TELIUM Tetra OS uses the latest cryptographic schemes with future-proof key length.

ALL PAYMENT OPTIONS

The Move/3500 enables NFC couponing and wallet use cases, in addition to EMV Chip & PIN, swipe and contactless.

USER-FRIENDLY AND INTUITIVE INTERFACE

Featuring a large 3.2-inch display, the Move/3500 provides a seamless payment experience.

DESIGNED FOR MOBILITY

Designed for indoor and outdoor use, the pocket-sized Move/3500 offers extended battery life. It is the perfect business companion for merchants.



ACCEPT ANY TYPE OF PAYMENT, WHILE DOING BUSINESS ON-THE-GO

MAXIMIZED NETWORK AVAILABILITY

In one single terminal, Move/3500 proposes a full spectrum wireless connectivity (with 4G, 3G, GPRS, Dual SIM, Bluetooth and WiFi), offering flexibility to merchant in the point of sale, while optimizing communication costs.

SEAMLESS NFC PAYMENT

The Move/3500 boosts NFC payment by offering to customers a seamless experience through a dedicated card-reader zone and faster transaction flows.

SECURE TELIUM TETRA OS

Backed by 40 years of experience and with its user-friendly interface, the Telium TETRA operating system includes the best security mechanisms embedded to protect transaction privacy and leverages Ingenico's unique portfolio of payment applications.

COMPATIBLE WITH INGENICO'S SUITE OF SERVICES


Keeping the solutions connected, the Move/3500 works in unison with Ingenico's supporting service platforms, meaning merchants will have access to business services such as back office reporting and e-receipt management. Software updates and day-to-day support deliver a hassle-free experience. The Move/3500 is supported by our Cloud Services.



**ACCEPT ANY TYPE OF PAYMENT, WHILE
DOING BUSINESS ON-THE-GO**

Processor	<ul style="list-style-type: none"> • Application & Cryptoprocessor 	<ul style="list-style-type: none"> • Cortex A5 	<ul style="list-style-type: none"> •
Memory	<ul style="list-style-type: none"> • Internal • External 	<ul style="list-style-type: none"> • 256MB Flash, 128MB RAM • 512MB Flash, 128MB RAM • MicroSD upto 32GB 	<ul style="list-style-type: none"> • <p>Option</p> <p>Option</p>
OS		<ul style="list-style-type: none"> • Telium TETRA 	<ul style="list-style-type: none"> •
SIM		<ul style="list-style-type: none"> • 2SIM 	Option
SAM		<ul style="list-style-type: none"> • 2SAM • 3rd SAM 	<ul style="list-style-type: none"> • <p>Option</p>
Card readers	<ul style="list-style-type: none"> • Magstripe • Smartcard • NFC/Contactless 	<ul style="list-style-type: none"> • ISO 3,500/2/1K lifespan • EMV Level 1, 500K lifespan • EMV Level 1 compliant 	<ul style="list-style-type: none"> • • <p>Option</p>
Data capture	<ul style="list-style-type: none"> • GPS 	<ul style="list-style-type: none"> • GPSTracking 	Option
Display	<ul style="list-style-type: none"> • Colour 	<ul style="list-style-type: none"> • 3.2" backlit, QVGA (320x240 pixels) 	<ul style="list-style-type: none"> •
Keypad		<ul style="list-style-type: none"> • 20 keys, raised marking, backlit • 20 keys, raised marking, backlit 	<ul style="list-style-type: none"> •
Audio	<ul style="list-style-type: none"> • Buzzer 		<ul style="list-style-type: none"> •

ThermalPrinter	<ul style="list-style-type: none"> • Speedinlines/s • Paperrollcage 	<ul style="list-style-type: none"> • upto30lines/s • 58mmwidthxØ40mm 	<ul style="list-style-type: none"> • •
Terminal connectivity	<ul style="list-style-type: none"> • WAN • LAN • Multicom 	<ul style="list-style-type: none"> • 4Gand/or3Gand/orGPRS • WiFiand/orBluetooth • WAN+LAN 	Option Option Option
Terminal connections	<ul style="list-style-type: none"> •USB 	<ul style="list-style-type: none"> • Host&Slave • DedicatedpowerJack 	<ul style="list-style-type: none"> • •
Battery	<ul style="list-style-type: none"> •Li-ion 	<ul style="list-style-type: none"> • 2200mAh • 2900mAh 	<ul style="list-style-type: none"> • Option
Terminalsize		<ul style="list-style-type: none"> • 169x78x57mm(6.6x3.1x2.2") 	<ul style="list-style-type: none"> •
Weight	<ul style="list-style-type: none"> •Terminal+Battery 	<ul style="list-style-type: none"> • 320g(11oz) 	<ul style="list-style-type: none"> •
Environment	<ul style="list-style-type: none"> • OperatingTemperature • Storage Temperature • Operating Humidity 	<ul style="list-style-type: none"> • -10°C to +40°C (14°F to 104°F) • -20°C to +55°C (-4°F to 131°F) • 85% non-condensing at +40°C (104°F) 	<ul style="list-style-type: none"> • • •
Accessory	<ul style="list-style-type: none"> • Privacyshield • CarCharger • Docking-station 	<ul style="list-style-type: none"> • FactoryMounted • Charger • 2RS232 • USBHost • USBSlave • Modem • Ethernet100/10BaseT • Bluetooth 	Option Option <ul style="list-style-type: none"> • Option Option Option Option Option
Security		<ul style="list-style-type: none"> • PCIPTS5.x&4.x online &offline certified 	<ul style="list-style-type: none"> •

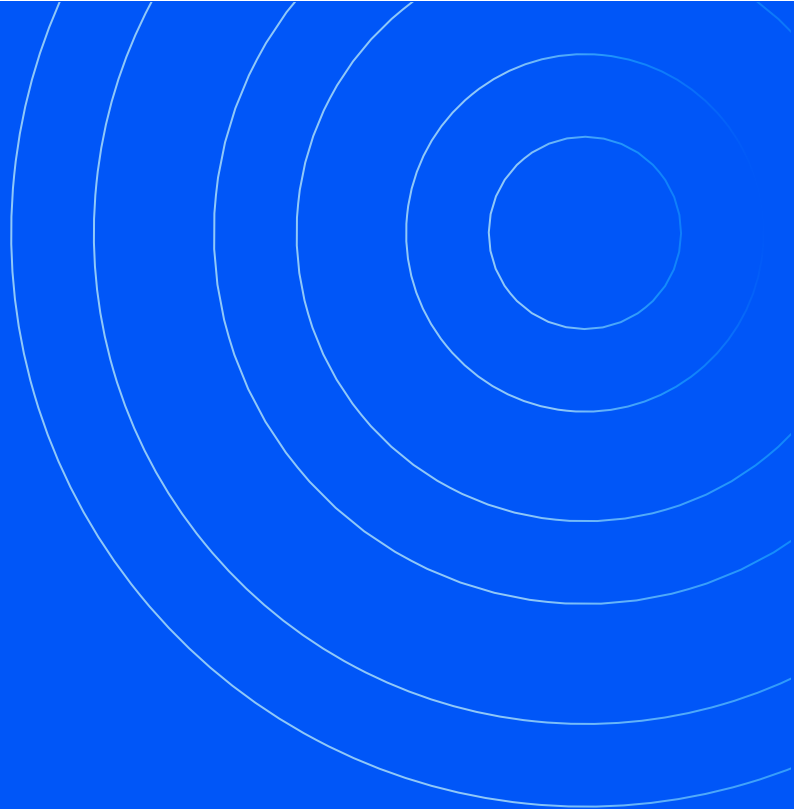

CONTACT

FOR QUESTIONS, PLEASE CONTACT

ALHAMRANI UNIVERSAL COMPANY
P.O. BOX 1229
JEDDAH 21431
KINGDOM OF SAUDI ARABIA

TEL: +966 12 606 5555
FAX: +966 12 606 2036

AU-SALES@UNIVERSAL.COM.SA
AU-INFO@UNIVERSAL.COM.SA